



CSLUX-300I

Multi-Format to HDMI Scaler
(with SDI Loop-through Output)



Operation Manual

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. Cypress Technology assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Cypress Technology assumes no responsibility for any inaccuracies that may be contained in this document. Cypress also makes no commitment to update or to keep current the information contained in this document.

Cypress Technology reserves the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from Cypress Technology.

© Copyright 2011 by Cypress Technology.

All Rights Reserved.

Version 1.1 August 2011

TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.





SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

REVISION HISTORY

VERSION NO.	DATE (DD/MM/YY)	SUMMARY OF CHANGE
VR0	13/11/12	Preliminary Release
VR1	18/12/12	Add D-sub to RCA adaptor
VR2	09/01/13	Add Support Timing Chart
VS3	24/06/13	Updated Format and Diagrams
VS4	29/07/13	RS-232 Command
VS5	23/01/17	Corrected diagrams and supported SDI standards



CONTENTS

1. Introduction	1
2. Applications	1
3. Package Contents	1
4. System Requirements	1
5. Features	2
6. Operation Controls and Functions	3
6.1 Front Panel	3
6.2 Rear Panel.....	4
6.3 Remote Control.....	5
6.4 OSD Menu	6
6.5 RS-232 Pin Assignment	9
6.6 RS-232 Commands.....	9
7. Connection Diagram	13
8. Specifications	14
8.1 Technical Specifications	14
8.2 Supported Input Resolutions	15
8.3 Supported Output Resolutions.....	16
9. Acronyms	17





1. INTRODUCTION

This unit is an advanced HDMI, VGA, SDI, Composite Video, S-Video, and Component Video switcher/scaler. This device can scale and switch input sources and display them to its HDMI and PC (VGA)/HD (Component Video) outputs simultaneously, with their associated audio signals, at a wide range of output resolutions up to 1080p or WUXGA (RB). It also has the added benefit of an SDI Loop-through output for monitoring or extending the SDI input signal. Control is via the IR remote, RS-232, or via front-panel buttons and includes an on-screen menu (OSD) providing settings and system information.

2. APPLICATIONS

- Digital and analog signal convergence
- Convert analog video/audio signals for use with digital displays
- Integrate multiple sources and signal types to a single display in a meeting room or conference hall environment

3. PACKAGE CONTENTS

- 1×Multi-Format to HDMI Scaler
- 1×Remote Control (CR-117)
- 1×5V/3A DC Power Adaptor
- 1×15-pin D-sub to 3 RCA Adaptor Cable
- 1×Operation Manual

4. SYSTEM REQUIREMENTS

Source equipment such as Blu-ray/DVD players or SDI camera, VGA or HDMI display and amplifier/active speakers with connection cables.


5. FEATURES

- Supports HDMI, SDI, Composite Video, S-Video, and VGA/Component Video inputs
- Supports HDMI and PC/HD (with adaptor) outputs
- Supports SDI loop-through output
- Supports analog stereo and optical digital inputs
- Supports optical digital output, analog stereo output, or embedding to HDMI output
- Supports conversion of multiple video formats and audio input to HDMI or PC/HD and analog stereo outputs
- Supports EDID and HDCP
- Supports 3D de-interlacing, noise reduction and 3D comb filter
- Supports frame rate conversion
- Supports RS-232, remote handset, and front panel control
- Supports SDI Standards of SMPTE 259M-C, SMPTE 292M, and SMPTE 424M/425M-A
- Supports SDI bit rates at 270Mbps, 2.970Gbps & 2.970/1.001Gbps, and 1.485Gbps & 1.485/1.001Gbps
- Supports SDI signal input and output distances of up to 300m for SD signals, 200m for HD signals and 100m for 3G signals

Note: The unit was tested with Belden 1694A SDI cable, results may vary with cables of a different specification.

6. OPERATION CONTROLS AND FUNCTIONS

6.1 Front Panel

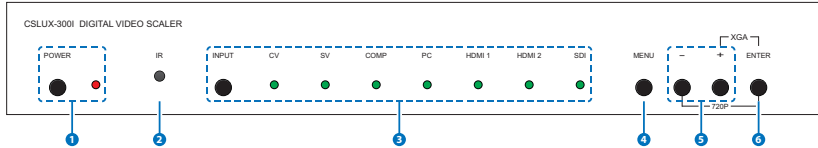

1 POWER Button & LED: Press this button to switch the device ON or to put the device into STANDBY mode. When the device is connected to an active power supply, the LED will illuminate and the device will switch ON automatically.

2 IR Receiver Window: Receives only the IR signal from the supplied remote control.

3 INPUT Button & LEDs: Press to repeatedly select the required input. An LED will illuminate to indicate the currently selected source.


4 MENU Button: Press this button to enter into the on-screen menu (OSD).

5 Minus/Plus (-/+) Buttons: Use these buttons to navigate down and up in the on-screen menu.

6 ENTER Button: Press this button to confirm the selection.

Note: Pressing '-' (MINUS) and ENTER simultaneously will immediately switch the output resolution of the device to 720p60. Pressing '+' (PLUS) and ENTER simultaneously will immediately switch the output resolution of the device to XGA.

6.2 Rear Panel

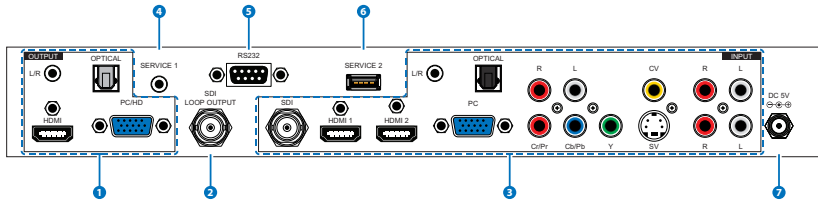

- 1 HDMI OUTPUT:** Connect to an HDMI display or amplifier for video and/or audio output.

PC/HD OUTPUT: Connect to a monitor/display for video output. For HD (Component) output, use the supplied D-sub 15-pin to 3 RCA adaptor cable for HD resolutions from 480p~1080p.

L/R OUTPUT: Connect to an amplifier or active speakers for audio output in stereo format.

OPTICAL OUTPUT: Connect to an amplifier or active speakers for audio output in digital format.
- 2 SDI LOOP OUTPUT:** Connect to an SDI display for monitoring of the SDI input signal or an SDI extender for extending the SDI signal to further areas.
- 3 SDI INPUT:** Connect to an SDI camera or other SDI source for both video and audio signal conversion.

HDMI INPUT 1/2: Connect to an HDMI source such as Blu-ray/DVD player for both video and audio signal conversion.

PC INPUT: Connect to a PC/Laptop source for video signal input with a 15-pin D-sub cable.

L/R INPUT: Connect to source's L/R output with 3.5mm Mini-jack for audio signal conversion.

OPTICAL INPUT: Connect to a source's optical output for audio signal conversion.

YCbCr/YPbPr & L/R INPUTS: Connect to source equipment such as a DVD player for both video and audio signal conversion.


CV & L/R INPUTS: Connect to a composite video source such as video/DVD player for both video and audio signal conversion.

SV & L/R INPUTS: Connect to an S-Video source such as a video/DVD player for both video and audio signal conversion.

- 4 **SERVICE 1:** Reserved for manufacturer use only.
- 5 **RS-232:** Connect to a PC/Laptop to use RS-232 commands to control the device.
- 6 **SERVICE 2:** Reserved for manufacturer use only.
- 7 **DC 5V:** Plug the 5V DC power supply into the unit and connect the adaptor to an AC outlet.

6.3 Remote Control

- 1 **POWER:** Press this button to switch the device ON or to put the device into STANDBY mode.
- 2 **INPUT:** Press to repeatedly select the required input. An LED will illuminate to indicate the currently selected source.
- 3 **CV/SV/COMP/PC/HDMI 1/HDMI 2/SDI:** Press to directly select the required input.
- 4 **MENU:** Press this button to enter the on-screen menu.
- 5 **EXIT:** Press this button to exit the menu or the current selection in the on-screen menu.
- 6 **OK & ▲/▼/◀/▶:** Press OK to confirm the selection or use the directional buttons to navigate the on-screen menus.
- 7 **AUTO ADJUST:** Press the button to optimize the positioning of the picture (picture centering) on the screen.
- 8 **RESET:** Press this button to return the device to the factory default settings.

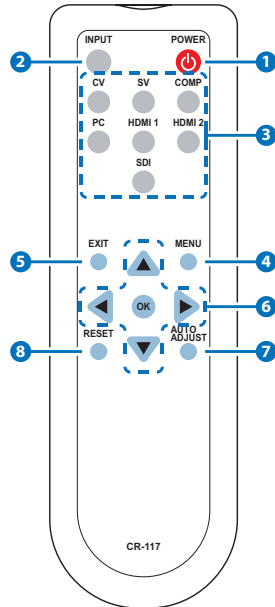

6.4 OSD Menu

MAIN MENU	1ST LEVEL	2ND LEVEL
DISPLAY	OUTPUT	640×480@60
		800×600@60
		1024×768@60
		1280×768@60
		1360×768@60
		1280×720@60
		1280×800@60
		1280×1024@60
		1440×900@60
		1400×1050@60
		1680×1050@60
		1600×1200@60
		1920×1080@60
		1920×1200@60
		720×480P@60
		1280×720P@60
		1920×1080I@60
		1920×1080P@60
		720×576P@50
		1280×720P@50
	1920×1080I@50	
	1920×1080P@50	
	SIZE	OVER SCAN
		FULL
		BEST FIT
PAN SCAN		
LETTER BOX		

MAIN MENU	1ST LEVEL	2ND LEVEL	
DISPLAY (cont.)	SIZE	UNDER 2	
		UNDER 1	
	MODE INFO	OFF	
		INFO	
		ON	
	PC	AUTO SETUP	
		H_POSITION	
		V_POSITION	
		PHASE	
		CLOCK	
		WXGA/XGA	
		RESET	
	COLOR	COLOR	R
			G
B			
R OFFSET			
G OFFSET			
B OFFSET			
CONTRAST		0~60	
BRIGHTNESS		0~60	
HUE		0~60	
SATURATION		0~60	
SHARPNESS		0~30	
NR		OFF	
		LOW	
		MIDDLE	
		HIGH	

MAIN MENU	1ST LEVEL	2ND LEVEL
AUDIO	VOLUME	0~100
	DELAY	OFF
		40ms
		110ms
		150ms
	SOUND	ON
		MUTE
	SDI AUDIO	CH1 - CH2
		CH3 - CH4
		CH5 - CH6
		CH7 - CH8
	AUDIO SELECT	ANALOG
S/PDIF		
SETUP	FACTORY RESET	
	KEY LOCK	OFF
		ON
	POWER SAVE	OFF
ON		
INFORMATION	INPUT	
	OUTPUT	
	REVISION	

Note: Default settings are marked in **Bold**.

(1) SIZE: This function is only supported on VIDEO input.

(2) PC: This function is only supported on PC input.

(3) AUDIO SELECT: This function is supported on CV, SV, YPbPr, and VGA inputs.

6.5 RS-232 Pin Assignment

SCALER			REMOTE CONTROL	
PIN	Assignment		PIN	Assignment
1	NC		1	NC
2	Tx		2	Rx
3	Rx		3	Tx
4	NC	▶	4	NC
5	GND	◀	5	GND
6	NC		6	NC
7	NC		7	NC
8	NC		8	NC
9	NC		9	NC

Baud Rate: 9600bps

Data Bits: 8

Parity: None

Flow Control: None


Stop Bits: 1

6.6 RS-232 Commands

COMMAND	DESCRIPTION
S SOURCE 0~6	0=SDI 4=VIDEO 1=HDMI1 5=S-VIDEO 2=HDMI2 6=PC 3=YpBpR
R SOURCE	Reports the numerical equivalent for SOURCE setting (as above)

COMMAND	DESCRIPTION
S OUTPUT 1~25	1=640×480 12=1600×1200 2=800×600 13=1920×1080 3=1024×768 16=1920×1200 4=1280×768 17=480p 5=1360×768 18=720p@60 6=1280×720 19=1080p@60 7=1280×800 20=1080i@60 8=1280×1024 22=576p 9=1440×900 23=720p@50 10=1400×1050 24=1080p@50 11=1680×1050 25=1080i@50
R OUTPUT	Reports the numerical equivalent for OUTPUT setting (as above)
S SIZE 0~6	0=OVERSCAN 4=LETTER BOX 1=FULL 5=UNDER 2 2=BEST FIT 6=UNDER 1 3=PAN SCAN
R SIZE	Reports the numerical equivalent for SIZE setting (as above)
S CONTRAST 0~60	Setups the numerical equivalent for CONTRAST setting (as left)
R CONTRAST	Reports the numerical equivalent for CONTRAST setting
S BRIGHTNESS 0~60	Setups the numerical equivalent for BRIGHTNESS setting (as left)
R BRIGHTNESS	Reports the numerical equivalent for BRIGHTNESS setting
S HUE 0~60	Setups the numerical equivalent for HUE setting (as left)

7. CONNECTION DIAGRAM

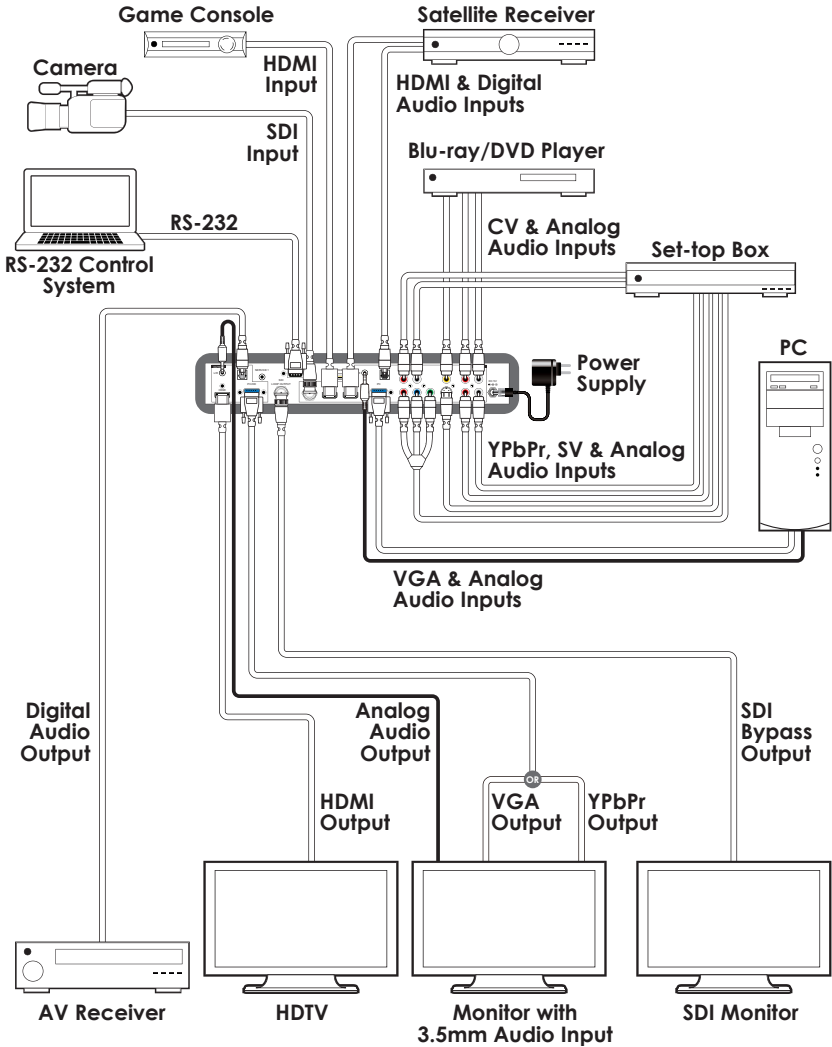

8. SPECIFICATIONS

8.1 Technical Specifications

Video Bandwidth	340MHz/10.2Gbps
Input Ports	1×SDI, 2×HDMI, 1×VGA, 1×Component Video, 1×Composite Video, 1×S-Video, 1×TOSLINK (S/PDIF), 6×RCA (Analog Stereo), 1×3.5mm (Analog Stereo)
Output Ports	1×SDI (Loop-through), 1×HDMI, 1×VGA, 1×TOSLINK (S/PDIF), 1×3.5mm (Analog Stereo)
Control Port	1×RS-232
Service Ports	1×3.5mm, 1×USB
Power Supply	5V/3A DC (US/EU standards, CE/FCC/UL certified)
Dimensions	320mm (W)×182mm (D)×44mm (H)
Weight	1,600g
Chassis Material	Metal
Color	Black
Operating Temperature	0°C - 40°C/32°F - 104°F
Storage Temperature	-20°C - 60°C/-4°F - 140°F
Relative Humidity	20 - 90% RH (No-condensing)
Power Consumption	10.5W

8.2 Supported Input Resolutions

Resolution (Hz)	CV/SV	COMP	PC	HDMI
NTSC/PAL	✓			
480i/576i		✓		✓
480p/576p		✓		✓
720p@50/60		✓		✓
1080i@50/60		✓		✓
1080p@50/60		✓		✓
VGA@60/72/75			✓	✓
SVGA@56/60/72/75			✓	✓
XGA@60/70/75			✓	✓
SXGA@60/75			✓	✓
UXGA@60			✓	✓
1280×800@60			✓	✓
1680×1050@60 (RB)			✓	✓
1920×1080@60			✓	✓

8.3 Supported Output Resolutions

Resolution (Hz)	PC	HD	HDMI
480p/576p		✓	✓
720p@50/60		✓	✓
1080i@50/60		✓	✓
1080p@50/60		✓	✓
VGA@60	✓		✓
SVGA@60	✓		✓
XGA@60	✓		✓
SXGA@60	✓		✓
UXGA@60	✓		✓
1280×768@60	✓		✓
1280×800@60	✓		✓
1360×768@60	✓		✓
1400×1050@60	✓		✓
1440×900@60	✓		✓
1680×1050@60	✓		✓
1920×1200@60	✓		✓

9. ACRONYMS

ACRONYM	COMPLETE TERM
COMP	Component Video
CV	Composite Video
DVI	Digital Visual Interface
EDID	Extended Display Identification Data
HDCP	High-Bandwidth Digital Content Protection
HDMI	High-Definition Multimedia Interface
IR	Infrared
NR	Noise Reduction
NTSC	National Television System Committee
OSD	On-screen Display (Menu)
PAL	Phase Alternating Line
RGB	Red Green Blue
SDI	Serial Digital Interface
SV	S-Video
USB	Universal Serial Bus
UXGA	Ultra Extended Graphics Array
VGA	Video Graphics Array
XGA	Extended Graphics Array
WUXGA	Wide Ultra Extended Graphics Array



CYPRESS TECHNOLOGY CO., LTD.

www.cypress.com.tw

20130625 MPM-CSLUX300I